

CELEBRATING
QUALITY SINCE
1982



DUROT®TAPE

The tale of solid trust

CMS Manufacturing, an associate of CMS group of companies is a fully integrated manufacturing unit of sell adhesive tapes in various OEM brand and flagship products is Durotape.

CMS always develop techniques to customize products in order to suit any kind of application and have the knowledge and understanding of products to deliver sound advice and better support. Focus to be the best fastest and the friendliest service in the adhesive tapes industry.

Prompt customer service provided by our strong and dedicated sales network within the UAE as well as across the globe helps us identify and cater to the ever growing needs of our customer as continued guest for customer satisfaction.





BOPP Tape

This is general purpose carton sealing tape for light duty and industrial applications. It has excellent weather resistance with water based adhesive available in shades of brown and clear.


Thickness	40M	45M	50M
Peel Adhesion	450 gm/in	520 gm/in	560 gm/in
Adhesive Type	Water Based Acrylic	Water Based Acrylic	Water Based Acrylic
Elongation	110%	110%	110%
Tensile Strength	9kg/in	9kg/in	10 kg / in

PVC / Pipe Wrapping Tape

PVC Tape is designed mainly for industrial use of pipe wrapping, ideal for underground pipeline or conduit corrosion, has good resistance to moisture, humidity corrosion and temperature variations, possesses outstanding conformity. This is made of plasticized PVC with rubber adhesive, is available in colors of black and white.



Thickness	Peel Adhesion	Adhesive Type	Temp Resistance	Elongation	Tensile Strength	Nature
0.15mm	1.6N/ cm	Rubber Based	-10° to + 80° C	180%	23 N/cm	Non Flame Retardant

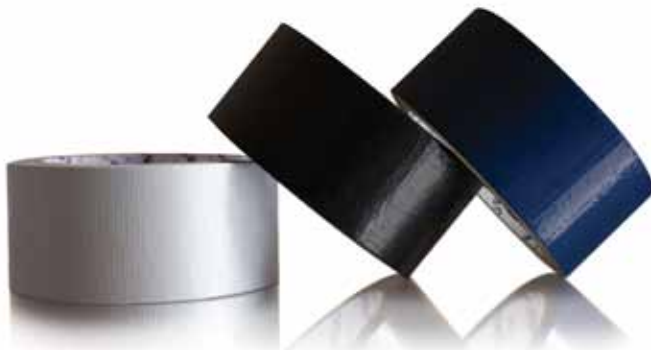

Duct Tape Grey / Cloth

The best choice for maintenance and repair applications. Heavy duty tapes tough & durable used in industries, buildings and wire protection and duct sealing etc. Made from polyethylene coated with rubber adhesive.

Thickness	Adhesion	Adhesive Type	Temp Resistance	Elongation	Tensile Strength	Cloth Mesh
250 Mic	25N/ 25mm (width)	Rubber Based	90°C	10%	60 N/cm	45



PE Foam Tape

Foam tape is used for cushioning or damping of sound shock and vibration, provides a good barrier to dust moisture, gas vapor and chemicals, also used for general mounting of mirror glass and splicing applications, strong rubber based adhesive with excellent flexibility.

Thickness	Peel Adhesion	Temp Resistance	Elongation	Tensile Strength
3mm	1kg/ 25mm	80° C	20%	20+-3lbs

Double Sided Tissue Tape

It is excellent for use when a high degree of quick stick and exceptional peel is required, it is used for mounting of name plates, core start-ups, laminating of cork and splicing paper textiles or plastics. It is hand treatable and it has water based acrylic glue.

Thickness	Peel Adhesion	Adhesive Type	Temp Resistance
95 Microns	15 - 20N/ 25mm	Water based acrylic	-20° to + 80° C



Aluminum/ Foil Scrim Kraft / Alu glass Tape

Aluminum tape is used for vapor sealing fiberglass duct board and sheets metal ducts, specially designed for air conditioning ducts. It's made from malleable aluminum foil with crossed linked acrylic.

Foil Scrim Kraft Tape is used for vapor sealing and patching on FSK faced fiberglass duct boards. This type conforms well to both fibers duct boards and blanket system that combines superior quick stick at normal temperature with superior low temperature performance below freezing designed to meet high strength and tear resistant, made from aluminum foil and acrylic adhesive.

Alu glass is mainly used in the HVAC industry for joining and sealing aluminum glass facing laminated fiberglass blanket/ duct board joints and seams; joining and sealing industrial pipe insulation seams and connections. Aluminum glass cloth backing provides excellent reflection of both heat and light. Aluminum glass cloth backing, combined with high performance synthetic rubber-resin adhesive, protected by an easy-release silicone release paper.



Aluminum	Thickness	Peel Adhesion	Adhesive Type	Temp Resistance	Rolling Tack	Elongation
	65 Micron	25N/ 25mm	Solvent Acrylic	-20° to + 70° C	20cm	5%
FSK	Thickness	Peel Adhesion	Adhesive Type	Temp Resistance	Rolling Tack	Elongation
	170 Micron	23N/ 25mm	Synthetic Resin	-20° to + 80° C	20cm	5%
Alu Glass	Thickness	Peel Adhesion	Adhesive Type	Temp Resistance	Rolling Tack	Elongation
	180 Micron	18N/ 25mm	Synthetic Resin	-20° to + 80° C	20cm	5%



Double Sided Foam Tape

It is excellent for use when a high degree of quick stick and exceptional peel is required, It is used for mounting of name plates, pipeline wrapping for air conditions, sign boards and stop lights assembly. It is hand treatable and it has solvent acrylic adhesive

Thickness	Peel Adhesion	Adhesive Type	Temp Resistance	Colour
1.0mm	9N/25mm	Solvent acrylic	0° + 35°C	White with Red Liner

CELEBRATING
QUALITY SINCE
1982



Masking Tape / Paper Tape

High performance masking tape designed for the most demanding industrial, painting and transportation industry. Its is mainly used for paint masking however it can also be used in the packaging industry for building & spicing. It is made from durable crepe paper with rubber adhesive.

Thickness	Peel Adhesion	Adhesive Type	Temp Resistance	Elongation	Tensile Strength
0.146mm	1.3N/ cm	Rubber Based	80° / 176F	10 ± 3%	20 ± 3lbs

DUROTAPE

Products from



Tel: +971 4 3232433, Fax : +971 4 3232466
sales.tapes@cmsglobal.com, P.O Box: 77532
Dubai, United Arab Emirates

cmsglobal.com